

Goods Only Hydraulic Lift

compact

The most reliable Lift Solution for goods

Features:

- Suspension 2:1 ■
- Rated load up to 1.500kg ■
- Dimensions of platform up to 2.000mm x 1.600mm ■
- Max travel up to 11,5m ■
- Max speed up to 0,15m/s ■
- Type Examination Certificate according to Machinery Directive 98/37/EC ■




Your 1st Choice in Lifts

www.kleermann.gr

TECHNICAL CHARACTERISTICS

Type	C 450 N	C 650 N	C 1000 N	CSG 200 N	CSG 450 N	CSG 650 N	CSG 1000 N	CSG 1200 N	CSG 1500 N				
Drive	Hydraulic (indirect roping)												
Max. Rated load (kg)	350	450	650	1000	300	350	450	650	1000	1200	1500		
Max Total suspended load (kg)	620	720	920	1315	1250	465	620	720	920	1315	1250	1670	2020
Min. pit (mm)	220	220	220	220	430	450	450	460	380	380	380	380	
Min. headroom (mm)	2200												
Type of safety gear	Instantaneous												
Type of rupture valve	3/4"												
Dimensions of LCU max (mm)	1250x1100	1250x1100	1400x1300	1000x1000	1250x1100	1250x1100	1400x1300	1800x1500	2000x1600				
Guide rails	T70x70x9	T70x70x9	T89x62x16	T70x70x9	T70x70x9	T70x70x9	T89x62x16	T125x82x16	T125x82x16				
Ram	Ø50 Ø60	Ø60	Ø70x5 Ø70x8	Ø50 Ø60	Ø50 Ø60	Ø60	Ø70x5 Ø70x8	Ø90x5	Ø100x5				
Number of steps	2 or 3												
Max travel (m) for max rated load (depending on ram)	7	10	9	7	9	9	11,5	7	10	9	9	9	10
Max rated speed (m/s)	0,15												
Guiding objects	Guiding shoes												
Distance between guides (mm)	702	702	818	454	702	702	818	946	1146				
Tank	T50	T50	T50	T50	T50	T50	T50	T150	T150				
Pump (lit/min)	8 or 12	12	12 or 15	8 or 12	8 or 12	12	12 or 15	27	36				
Motor (kw)	1,5/230 - 2/400V	1,5/230 - 2/400V	2,5/230 - 2/400V	1,5/230 - 2/400V	1,5/230 - 2/400V	1,5/230 - 2/400V	2,5/230 - 2/400V	3,5/230 - 3 / 400V	4,5/230 - 4,4 / 400V				
Landing doors	Hinged (semiautomatic)												

Types

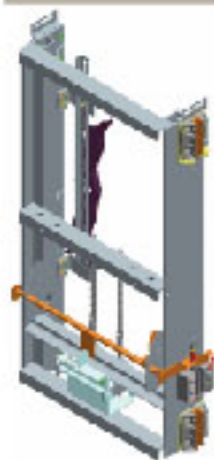

Trolley



C450N
C650N
C1000N



Car sling

CSG200N
CSG450N
CSG650N
CSG1000N
CSG1200N
CSG1500N

Planning data

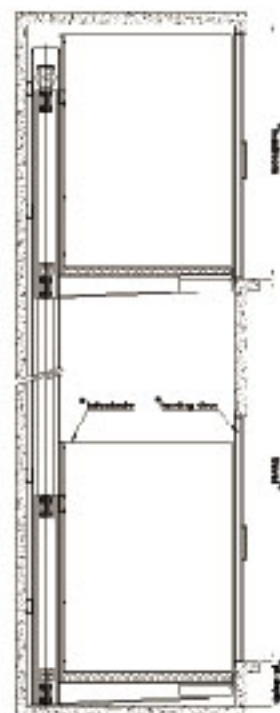

*According to site



Head offices - Export Sales: Kilikis Industrial Area, P.O. Box 25, Post Code 61 100, Kilikis, Greece,
Operator: +30 23410 38 100, Fax: +30 23410 38 200, E-Mail: headoffice@kleemann.gr, www.kleemann.gr



Kilikis Industrial Area, Post Code 61 100, Kilikis, Greece, Operator: +30 23410 75 730, Fax: +30 23410 75 733, E-Mail: commercial@klefer.gr
www.klefer.gr



Yukari Dudullu, Türkler, Cad No 34 34775, Ümraniye İstanbul TÜRKİYE, Tel.: +90 216 4662267, Fax: +90 216 4662285,
E-Mail: info@kleemannturk.com



Golubinačka b.b, Šimanovci, Beograd Serbia - Montenegro, Tel/fax (+381 22) 80-280, 80-090, E-Mail: office@kleemann.co.yu



63 Marasesti Blvd. Sector 4, Bucharest, Romania, Tel.: 0040 21 3367739, Fax: 0040 21 3374428